

VPRO-NVR-8-POE-U

8CH Network Video Recorder with PoE



Key Features

- Support Ultra265/H.265/H.264 video formats
- 8 channel input
- Plug & Play with 8/16 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile C, Profile Q, Profile A, Profile T
- Support HDMI and VGA simultaneous output
- Up to 8MP resolution recording
- Up to 8TB for each disk
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- ANR technology enhances storage reliability when the network is disconnected
- Support cloud upgrade

Specifications


| | |
|-------------------------------|---|
| VIDEO/AUDIO INPUT | |
| IP Video Input | 8-ch |
| Two-way Audio Input | 1-ch, RCA |
| NETWORK | |
| Incoming Bandwidth | 64Mbps |
| Outgoing Bandwidth | 96Mbps |
| Remote Users | 128 |
| Protocols | SNMP, P2P, UPnP, NTP, DHCP, PPPoE |
| VIDEO/AUDIO OUTPUT | |
| HDMI/VGA Output | VGA: 1024X768@60,1280X720@60,1280X1024@60,1920X-1080@50,1920X1080@60 HDMI: 4k(3840x2160@30),4k(3840x2160@60),1024X768@60,1280X-720@60,1280X1024@60,1920X1080@50,1920X1080@60 |
| Recording Resolution | 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| Audio Output | 1-ch, RCA |
| Synchronous Playback | 8-ch |
| Corridor Mode Screen | 3/4/5/7/9 |
| DECODING | |
| Decoding format | Ultra265/H.265/H.264 |
| Live view/Playback | 18MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| Capability | 1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30, 16 x D1 |
| HARD DISK | |
| SATA | 2 SATA interfaces |
| Capacity | up to 8TB for each disk |
| SMART | |
| VCA Detection | 8 SATA interfaces |
| VCA Search | Face search, Behavior search |
| Statistical Analysis | People counting |
| EXTERNAL INTERFACE | |
| Network Interface | 1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface |
| USB Interface | Front panel: 1 x USB2.0, Rear panel: 1 x USB2.0 |
| Alarm In | 4-ch |
| Alarm Out | 1-ch |
| POE | |
| Interface | 8 independent 100Mbps PoE network interfaces |
| Max Power | Max 30W for single port Max 130W in total (16.25W for each) |
| Supported Standard | IEEE 802.3af/at |
| GENERAL | |
| Power Supply | 220V AC, Power Consumption: ≤9 W(without HDD) |
| Working Environment | -10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH(non-condensing) |
| Dimensions (W × D × H) | 380mm x 315mm x 49.1mm (15.0" x 12.4" x 1.9") |
| Weight (without HDD) | ≤2.4kg (5.29 lb) |

VPRO-NVR-8-POE-U

8CH Network Video Recorder with PoE



Dimensions

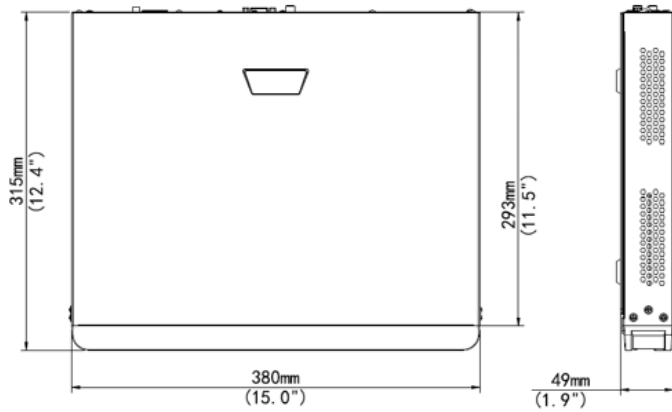

Back Panel

