

PRO SERIES SVEX-EX-CD-A


Explosion Proof Dome Camera Housing



Features:

- Available in 304 Or 316L stainless steel
- IP68 rating
- Supports Pelco-D and Pelco-P
- 360° horizontal rotation at 0.1°/s - 300°/s
- -90° to 0° vertical tilt at 0.1°/s - 250°/s

Dimensions:

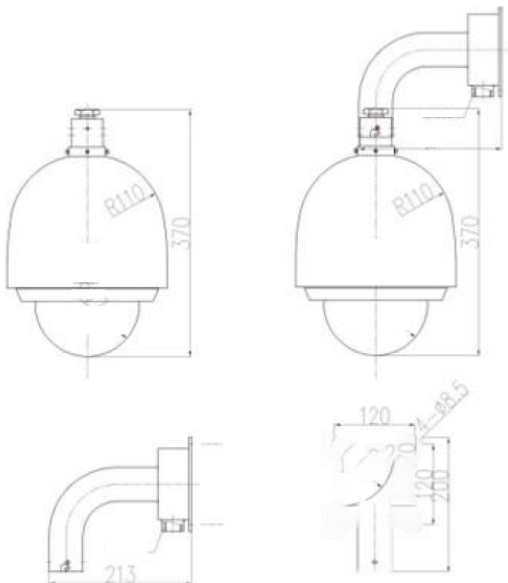

Specifications:

CERTIFICATES	
Certificate Mark	Ex d IIC T6 Gb/Ext DA21,IP66 IP68 T80°C
Zone Application	CNEx20.4938X
Standards	Q/320412 ZAF026-2020
MECHANICAL	
Housing	Stainless steel 304 or 316L
IP	IP68
Cable Thread Hole	1pcs M28 x 1.5 to G3/4
Wiper	No
ELECTRICAL	
Voltage	AC85V ~ AC265V or DC24V or AC24V
Power	25W/35W (with thermostat)
Surge Protect	Optional, TVS6000V surge protect
AMBIENT	
Ambient Temperature	-25°C to +60°C
Air pressure	80Kpa to 106Kpa
Relative Humidity	≤95% (no condensation)
COMMUNICATION	
Communication	Supports analog video output
485 Communication	Supports Pelco-D, Pelco-P
Communication Rate	2400 to 19200bps
PAN AND TILT	
Horizontal	360°
Speed	Horizontal 0.1-300°/s, Vertical 0.1-250°/s
Vertical	-90° to +0°
Cruise Scan	Supported
Keep Watch	Supported
Preset	64/128/255/300
Resume function	Supported
Auto Cruise	Supported
Auto Pattern	Supported
Auto Scan	Supported
GENERAL	
Cable	integrated cable
Size	213 x 213x 570 (mm)
Net Weight	15kg
Mounted	wall, pole