

SVEX-FLEXTUBE

Explosion-proof Flexibility Tube




VEILUX[®]
The Art of Surveillance



Specifications

CERTIFICATES	
Certificate Mark	Ex e IIC Gb
GENERAL	
Connector Material	Carbon Steel or Stainless steel 304 or 316L
Connector size	G3/4
Ingress Protection	IP68
Ambient Temperature	-25°C to 60°C
Air Pressure	80Kpa to 106Kpa
Relative Humidity	≤95% (no condensation)
Length (Available in Various Sizes)*	1m, 1.5m, 2m

Dimensions

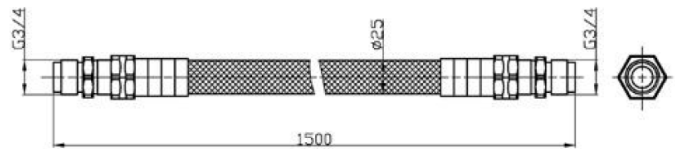

Overview

SVEX-FLEXTUBE is designed for explosion-proof electrical equipment, for cable in-out where a steel pipe is not suitable.

Features

- High pressure resistant rubber tube, engineered for extended wear and tear
- Good flammation, oil & corrosion resistance
- For indoors & outdoor use
- Easy installation & maintenance

*Model Number of Sizes Available

Type	Inner Dia. (mm)	Outer Dia. (mm)	Rubber Thickness (mm)		Steel Net Dia. (mm)		Min Bend Dia. (mm)	Screw Joint Type	Total Length (m)
			Inner	Outer	Size	Accuracy			
SVEX-FLEXTUBE-1	13	23	>1.5	>1.0	20.0	±0.8	190	G-3/4"	1.0
SVEX-FLEXTUBE-1.5									1.5
SVEX-FLEXTUBE-2									2.0