

VBIP-2E

1080P Network IR Mini Bullet



VEILUX[®]
The Art of Surveillance




Specifications

Key features

- 1/2.7" Progressive Scan CMOS
- 3.6mm lens
- 1080P@30fps
- Multiple Streams
- IR Range 15-20m
- Low bitrate control
- 3D DNR,dWDR,ICR
- Support ROI,Corridor mode,HLC
- D-WDR more than 100dB
- ONVIF 2.4 (Profile S)

Dimensions

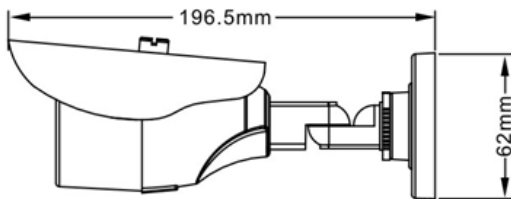

| CAMERA | |
|-------------------------|---|
| Image Sensor | 1/2.7" Progressive Scan CMOS |
| Min. illumination | Color 0.2Lux;IR ON 0 Lux |
| Day & Night | ICR |
| Shutter Speed | 1/1-1/10000 |
| Auto Iris | Fixed |
| Wide Dynamic Range | dWDR |
| Digital Noise Reduction | 2D/3D |
| Lens | 3.6mm |
| FOV | 85° |
| IR LED | 18pcs |
| IR Range | 15-20 m |
| IMAGE | |
| Video Compression | H.264 High/Main/Baseline Profile, MJPEG |
| Bit Rate (CBR/VBR) | Main stream:500kb-12000kb ;Sub stream 100kb-6000kb |
| Audio Compression | G.711 ,RAW_PCM |
| Max.Resolution | 1920x1080/30fps |
| Stream | Stream1 1920x1080/1280x720 Stream 2 D1 to QVGA |
| Image Setting | Rotate Mode,Saturation,Brightness,Contrast,Sharpness |
| HLC | Yes |
| 9:16 Corridor mode | Yes |
| ROI | Yes |
| Defog | N/A |
| NETWORK | |
| Network Protocols: | HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPPoE, Unicast and Multicast supported. |
| Alarm Trigger | Motion Detection,Networkdisconnect,Disk alarm |
| RTSP Video | Standard RFC2326, Support QuickTime / VLC Player. |
| Security | User security authentication, Reset, Hardware WatchDog |
| Web Language | English, Chinese,Polish, Italian, Portuguese, Spanish.(Sunell Brand) |
| System Compatibility | Onvif,CGI |
| Interface | |
| Ethernet | 1 Ethernet (10/100 Base-T) RJ-45 Connector |
| Audio I/O | N/A |
| Alarm I/O | N/A |
| RS485 | N/A |
| BNC Output | N/A |
| Reset Button | N/A |
| Edge Storage | N/A |
| GENERAL | |
| Power Supply | DC12V/POE |
| Power Consumption | 2.5W(IR LED OFF); 5W (IR LED ON) |
| OperatingTemperature | Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F) |
| Operating Humidity | 0% - 90% RH |
| Ingress Protection | IP66 |
| Approvals | CE / FCC |
| Product Dimensions | Φ196.5*62mm |
| Product Weight | 360g |

Veilux Inc

802 Greenview Dr. Suite 200, Grand Prairie TX. 75050 USA

Toll Free: 1-800-510-6528 Direct: (+1) 214 635-4855

Fax: (+1) 214 988-2858 sales@veilux.net www.veilux.net