

VBIP-2V-M-H5Z

1080P Starlight Motorized Network IR Bullet




VEILUX[®]
The Art of Surveillance



Key features

- 1/2.8" Progressive Scan CMOS
- Motorized lens 2.7-12mm
- Remote zoom with auto focus.
- 50fps/60fps@1080P(1920*1080)
- Triple Streams
- Smart IR Up to 30m
- Low bitrate ,Excellent low light performance
- WDR,3D DNR
- ROI,Defog,HLC,Corridormode,DIS
- IP67

Dimension

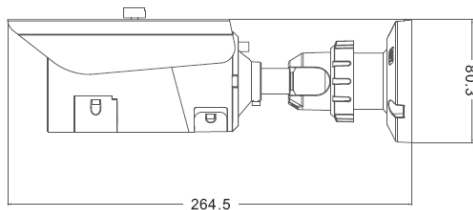

Specifications

CAMERA	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. illumination	Color:0.001Lux@(F1.2,AGC ON) ;B/W:0Lux@(IR LED ON)
Day & Night	ICR
Shutter Speed	1/5s-1/20000s
Auto Iris	Yes
Wide Dynamic Range	WDR>120dB
Digital Noise Reduction	2D/3D
Lens	Motorized lens 2.7-12mm P-Iris
FOV	105° ~ 32°
IR LED	10pcs
IR Range	Up to 30m
IMAGE	
Video Compression	H.265/H.264, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ;Sub stream 100kb-6000kb
Audio Compression	G.711 ,RAW_PCM
Max.Resolution	1920x1080/60fps
Stream	Stream1 1920x1080/1280x720 Stream 2 D1 to QVGA Stream 3 1920x1080/1280x720/D1/VGA/640x360/CIF/QVGA
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC/ 9:16 Corridor mode	Yes/ Yes
DIS	Auto
ROI/ Defog	Yes/Yes
NETWORK	
Network Protocols:	IPv4,802.1x,HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, Unicast and Multicast
Alarm Trigger	Perimeter ,Single Virtual Fences ,Double Virtual Fences ,Loiter ,Multi Loiter , Object Left ,Object Removed, Abnormal Speed ,Converse, Illegal Parking ,Signal Bad , Motion Detection, Network disconnect, Disk alarm, I/O alarm
Motion Detection	4 Configurable regions
Privacy mask	4 Configurable regions
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware Watch Dog
Web Language	English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian (Sunell Brand)
System Compatibility	Onvif
INTERFACE	
Ethernet	I1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	1ch Audio In&1ch Audio Out
Alarm I/O	N/A
RS485	N/A
BNC Output/ Reset Button	Yes/ Yes
Edge Storage	Micro SD/SDHC/SDXC slot ,Max128GB
GENERAL	
Power Supply	DC12V/POE, comply with IEEE 802.3
Power Consumption	5W(IR LED OFF); 8W (IR LED ON)
OperatingTemperature	Starting Temperature: -30 ° C ~ 60 ° C (-22 ° F ~ 140 ° F) Working Temperature:-40 ° C ~ 60 ° C (-40 ° F ~ 140 ° F)
Operating Humidity	0% - 90% RH
Ingress Protection	IP67
Approvals	CE / FCC
Product Dimensions	φ 80.3×264.5mm
Product Weight	830g

Veilux Inc

802 Greenview Dr. Suite 200, Grand Prairie TX, 75050 USA
Toll Free: 1-800-510-6528 Direct: (+1) 214 635-4855 Fax: (+1) 214 988-2858
sales@veilux.net www.veilux.net