

VL-EX30-XX


Explosion Proof Sealeable Mining Light



Features

- Input voltage: AC100-270V
- LED source: Cree
- PF: >0.95
- CRI: Ra>75
- Protection Grade: IP66
- Lumen flux: 120lm/w
- Anti corrosion: WF2
- Weight: 3.2kg
- Size: Ø 180x133mm
- Beam angle: 111.1°
- Ex-proof Grade: ExdIICT6

Diagram

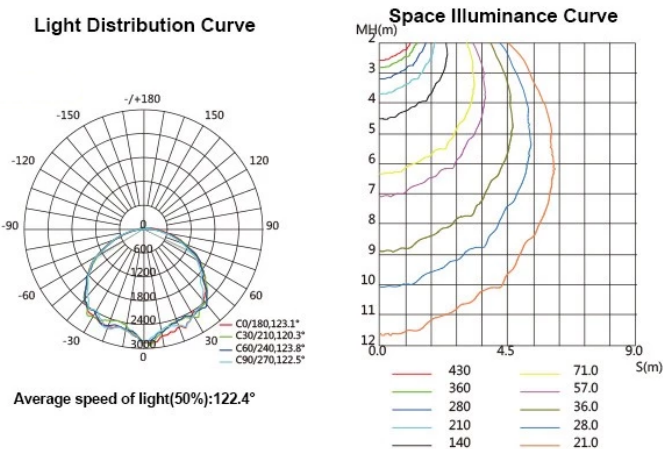

Specifications

Warranty	3 years
CRI	75Ra
IP Rating	IP66
Operating Temperature	-20°C to 85°C / -4°F~185°F
Storage Temperature	-20°C to 85°C / -4°F~185°F
Anti-Corrosion Grade	WF2
Light Efficiency	120 Lm
Rated Voltage	AC85-265V, AC85-265V
LED'S Operating Life	100000 h
Light Efficiency	250 Lm
Certifications	CCC, CE, EMC, LVD, Rohs
Light Source	LED
Correlate Color Temperature	3000-6700 K
Color Rendering Index (CRI)	75
LED Chip	CREE
Explosion Proof Grade	ExdIICT6
Weight	3.2 kg / 7.1 lbs
Size (Diameter x H)	Ø 180 x 133 mm / Ø 7.1" x 5.2" in.

Models Available

MODEL	VOLTAGE
VL-EX30-20	20W
VL-EX30-30	30W
VL-EX30-40	40W
VL-EX30-45	45W

Dimensions

