

# VL-EXL-8235-XXX



Explosion proof high bay light



## Key Features

- Input Voltage: AC100-270 v
- Led Source: Cree
- PF>0.95 CRI: Ra>75
- Protection Grade: IP66
- Lumen Flux: 120 lm/w
- Anti Corrosion: WF2
- Weight: 10.5 kg / 23.1 lbs
- Size: 415 x 245 mm / 16.3 x 9.6 in
- Beam Angle: 89.4°
- Ex-proof Grade: ExdIICT6
- Carton Size: 44.5 × 44.5 × 31.5 cm / 17.5 x 17.5 x 12.4 in
- Gross Weight: 8.3 kg / 18.2 lbs

## Dimensions

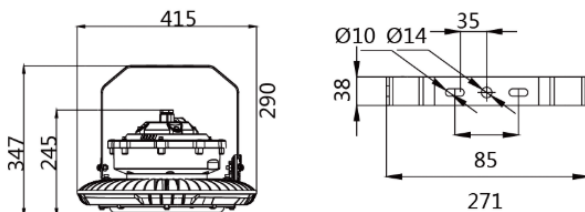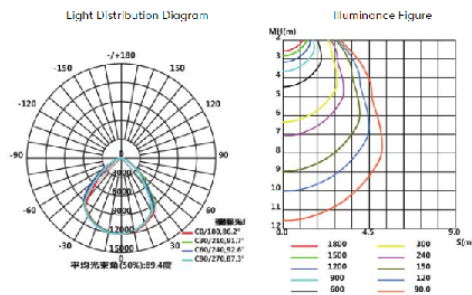

SPECIFICATIONS	
VIDEO INPUT	
<b>Rated Voltage</b>	AC220 v
<b>Power</b>	100-150 w
<b>Frequency</b>	50/60 hz
<b>Light Efficiency</b>	120 lm
<b>Power Factor</b>	>0.95 pf
<b>Operating Temperature</b>	-30~50 °C / -22~122 °F
<b>Storage Temperature</b>	-30~50 °C / -22~122 °F
<b>Protection Level</b>	IP66
<b>Lighting Angle</b>	110 °
<b>Light Source</b>	led
<b>Correlate Color Temperature</b>	3000-6500 k
<b>Color Rendering Index</b>	≥70 ra
<b>LED Qty</b>	150 pcs
<b>Base Specifications</b>	CREE3030
<b>LED'S Operating Life</b>	100000 h
<b>Start-Up Time</b>	≤0.2 s
<b>Anti-Corrosion Grade</b>	WF2
<b>Explosion Proof Grade</b>	ExdIICT6W
<b>Executive Standard</b>	GB3836.1 / GB3836.2
<b>Weight</b>	8.7 kg / 19.1 lbs
<b>Size</b>	415 × 245 mm / 16.3 x 9.6 lbs

## Models Available

MODEL	VOLTAGE
<b>VL-EXL8235-150</b>	<b>150W</b>
<b>VL-EXL8235-200</b>	<b>200W</b>
<b>VL-EXL8235-240</b>	<b>240W</b>