

# VL-EX8235S-XXX



Explosion proof high bay light



## Key Features

- Input Voltage: AC100-270 v
- Led Source: Cree
- PF>0.95 CRI: Ra>75
- Protection Grade: IP66
- Lumen Flux: 120 lm/w
- Anti Corrosion: WF2
- Weight: 4.6 kg / 10.1 lbs
- Size: 356 x 232 mm / 14 x 9.1 in
- Beam Angle: 89.4°
- Ex-proof Grade: ExdIICT6
- Carton Size: 38.5 x 44.5 x 31.5 cm / 15.1 x 17.5 x 12.4 in
- Gross Weight: 5.6 kg / 12.3 lbs

## Dimensions

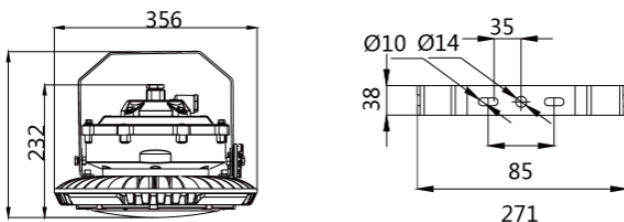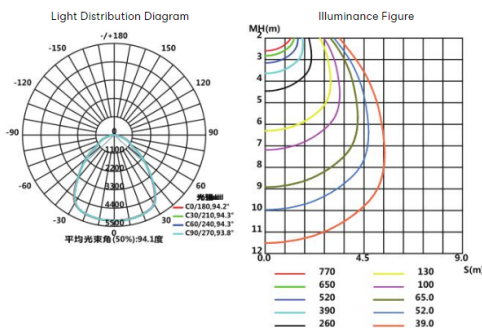

SPECIFICATIONS	
<b>VIDEO INPUT</b>	
Rated Voltage	AC220 v
Power	100-150 w
Frequency	50/60 hz
Light Efficiency	120 lm
Power Factor	>0.95 pf
Operating Temperature	-30~50 °C / -22~122 °F
Storage Temperature	-30~50 °C / -22~122 °F
Protection Level	IP66
Lighting Angle	95 °
Light Source	led
Correlate Color Temperature	3000-6500 k
Color Rendering Index	≥70 ra
LED Qty	150 pcs
Base Specifications	CREE3030
LED'S Operating Life	100000 h
Start-Up Time	≤0.2 s
Anti-Corrosion Grade	WF2
Explosion Proof Grade	ExdIICT6W
Executive Standard	GB3836.1 / GB3836.2
Weight	8.7 kg / 19.1 lbs
Size	356 x 232 mm / 14 x 9.1 in

MODEL	VOLTAGE
VL-EX8235S-100	100W
VL-EX8235S-120	120W
VL-EX8235S-150	150W