

# VP-TVI-2MIR33X

1080P TVI IR Analog PTZ




**VEILUX**<sup>®</sup>  
The Art of Surveillance



## Key Features

- 1/2.9" Sony Progressive Scan CMOS
- Optical Zoom 33X, f=4.6mm~152mm
- Full HD 1080P
- Video Transmission 300m
- ICR, Dwdr, 3D DNR, HLC, Mirror, BLC
- IR Range 150m
- IP66
- OSD menu via UTC Technology

## Dimensions

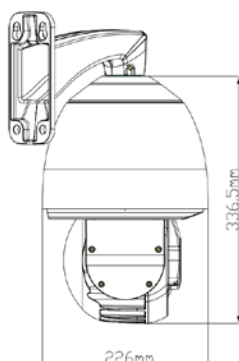

CAMERA	
Image Sensor	1/2.9" Sony CMOS
Effective Pixels	1920(H)*1080(V)
Signal System	PAL/NTSC
Min. illumination	Color :0.1lux, BW :0.01lux
Day & Night	ICR
Shutter Speed	PAL:1/50-1/50000 ; NTSC 1/60-1/60000
Auto IRIS	Auto
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D
S/N Ratio	>58dB
Lens	Optical Zoom 33X, f=4.6mm~152mm
Resolution	1100 TVL
FOV	Appr.55.2° (Wide) to 3.2° (Tele)
IR LED	12pcs
IR Range	150m
Up the Coax	Support
Alarm I/O	Optional (4ch Alarm In, 1ch Alarm Out)
IMAGE	
Resolution	1080P
Mirror	Support
BLC	Support
HLC	Support
Motion Detection	N/A
PTZ	
Rotation	Pan continuously 360° ,Tilt 0~90° with auto-flip
Speed Proportion	As the length of focus, to auto-adjust the speed
Preset	128 preset
Scan	4 scan
Pattern	4 patterns
Tour	4 tour
GENERAL	
Power Supply	DC24V ± 10%
Power Consumption	MAX 60W
Temperature	-10°C ~ 55°C (14°F ~ 131°F )/ -30 °C~60 °C (-22 °F~140 °F) with heater
Installation	Wall mount, Pendent mount
Product Dimensions	Φ226x.336.5mm
Product Weight	6.9kg

## Veilux Inc

802 Greenview Dr. Suite 200, Grand Prairie TX. 75050 USA  
Toll Free: 1-800-510-6528 Direct: (+1) 214 635-4855 Fax: (+1) 214 988-2858  
sales@veilux.net www.veilux.net