

PRO SERIES VPRO-NVR-64R-8H-U

64 Channel Network Video Recorder with 8HDD



Features:

- Support Ultra 265/H.265/H.264 video formats
- 64-channel input
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T) and RTSP protocols
- Support 2-ch HDMI, 1-ch VGA. HDMI1 and HDMI2 up to 4K (3840x2160) resolution
- HDMI1, HDMI2, VGA independent outputs provided
- Up to 12 Megapixels resolution recording
- Support RAID 0, 1, 5, 6, 10
- 8 SATA HDD, up to 10TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade
- Support N+1 Hot spare
- Support for 12V Power output

Specifications:

VIDEO/AUDIO INPUT	
Video input (IP)	64ch
Two-way Audio	1-ch, RCA
NETWORK	
Incoming Bandwidth	384Mbps
Outgoing Bandwidth	384Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS
Browser (Plugin)	Windows:IE(IE10/11), Firefox (version 52.0 and above), Chrome(version 45 and above), Edge(version 79 and above)
VIDEO/AUDIO OUTPUT	
HDMI Output	HDMI1/HDMI2(HDMI audio output is not supported):4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
VGA Output	VGA:1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
RCA Audio Output	1-ch
Liveview Display	VGA:1/4/6/8/9/16/25/36 HDMI1/HDMI2:1/4/6/8/9/16/25/36/64
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
DECODING	
Decoding Format	Ultra 265, H.265, H.264
Decoding Capability	2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30, 32 x 960P@25, 36 x 720P@30, 64 x D1
Audio Compression	G.711A, G.711U
SNAPSHOT	
FTP/Schedule/Event Snapshot	64-ch snapshot, up to 4K resolution
RECORDING	
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P/D1/2CIF/CIF
Synchronous Playback in Local	16-ch
HARD DISK	
SATA	8 SATA Interfaces
Capacity	Up to 10TB for each HDD(The maximum HDD capacity varies with environment temperature)
eSATA	1 eSATA interface
Disk Array Type	RAID 0, 1, 5, 6, 10
Disk Group	support
ALARM	
General Alarm	Motion, Tampering, Human Body Detection, Video Loss, Alarm input, Audio Detection
Alert Alarm	IP Conflict, Network Disconnected, Disk offline , Disk Abnormal, Illegal Access, Hard disk space low, Hard disk full, Recording/Snapshot Abnormal


PRO SERIES VPRO-NVR-64R-8H-U

64 Channel Network Video Recorder with 8HDD




EXTERNAL INTERFACE	
Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
USB	Front panel: 2 x USB2.0; Rear panel: 1 x USB3.0
RS485	1
RS232	1
Alarm In	16-ch
Alarm Out	4-ch
Power Output	12V
Power Supply	AC 100 - 240 V
Power Switch	Support
GENERAL	
Power Supply	AC 100 - 240 V
Power Consumption (without HDD)	≤ 25W
Working Temperature	-10 °C ~ 55 °C (14 °F ~ 131 °F)
Working Humidity	≤ 90% RH (non-condensing)
Weight (without HDD)	≤ 5.7Kg (12.57lb)
Dimensions	442mm × 426mm × 89mm (17.4" × 16.8" × 3.5")

Rear Panel:

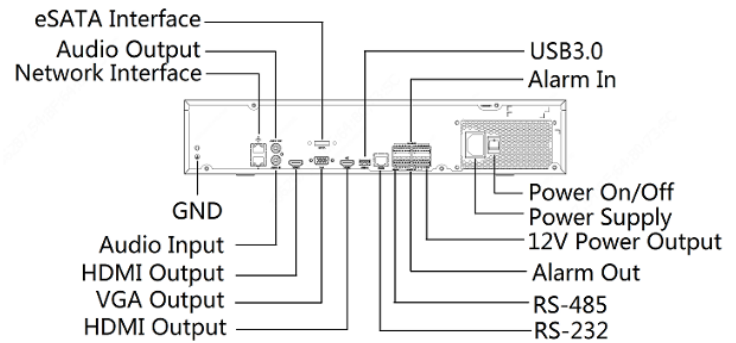

Dimensions:

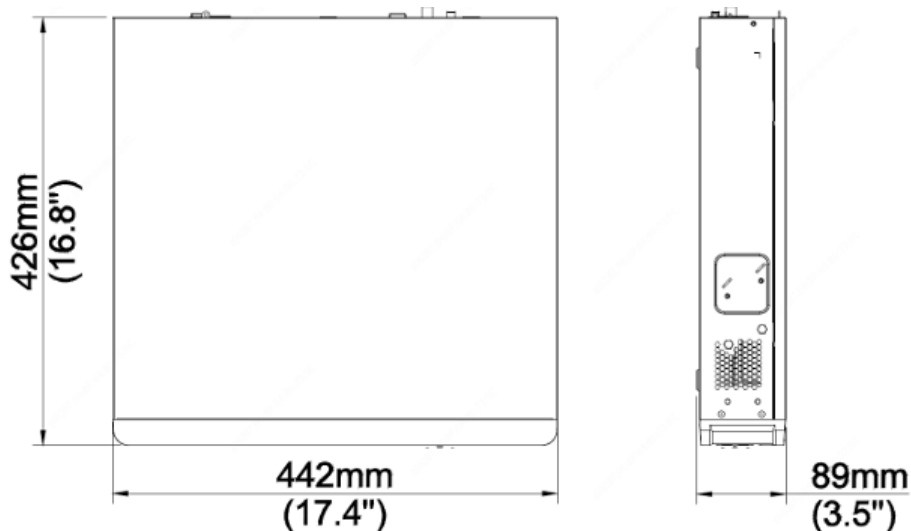


PRO SERIES VPRO-NVR-64R-8H-U

64 Channel Network Video Recorder with 8HDD



Panels:

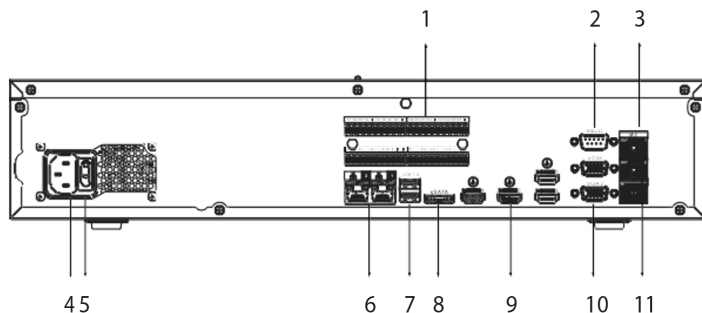

- | | | | |
|----|--------------------------|----|---------------|
| 1 | Alarm In/Out | 2 | RS-232 Port |
| 3 | AUDIO OUT, RCA Connector | 4 | Power Input |
| 5 | Power Switch | 6 | Network Ports |
| 7 | USB Ports | 8 | eSATA Port |
| 9 | HDMI Ports | 10 | VGA Ports |
| 11 | AUDIO IN, RCA Connector | | |