

ACCESS CONTROL VTU - D412



Full Height Turnstile -Double Door

Full Height Turnstile (double door)

VTU-D412 full height turnstile is the highest security kind of turnstile and designed in double door type for pedestrian access, which can make stricter force control than other type. It is suitable for areas with high security. (e.g.: Embassy, stadium, bank, jail, oil field, construction site, station).



ACCESS CONTROL VTU - D412

Full Height Turnstile -Double Door




Features


- Two way or one way working.
- 304 brushed stainless steel, durable and antirust.
- The movement with absorber structure, making the product operate very quietly.
- Support integrated with any type of access control systems.
- Anti-tailing function: only one person passes at one time.
- Structure of trunking to contain cable tidy inside the case.
- Green and red LED indicator display passing status.
- IP65 waterproof level, indoor/outdoor use.
- Fire safety requirements, arms open automatically.
- Entry direction can be controlled manually through lock.




Manually Control Entry Direction

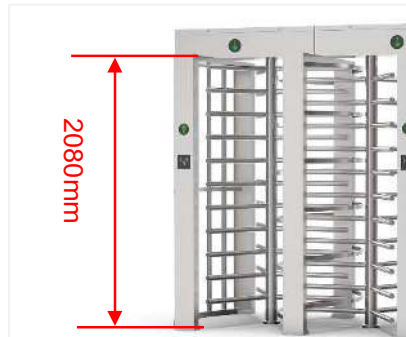

2080mm High Inner Space

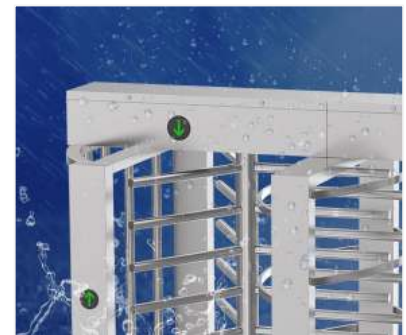

304SS Waterproof

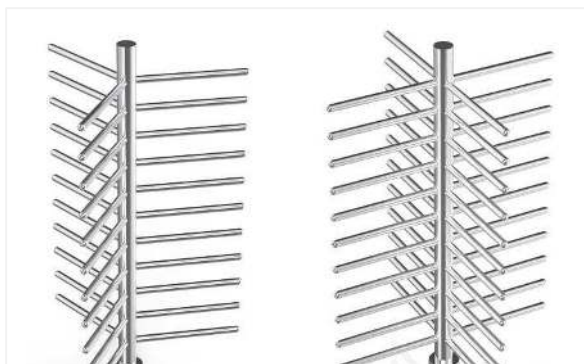

90°/120° Rotor Optional (three or four sections)



Anti-tailing Function: one person can pass at one time

ACCESS CONTROL VTU - D412



Full Height Turnstile -Double Door



Card Solution



QR/Bar Code Solution



Biometric Solution



Remote Control



Touchless Button



Card



QR Code



Fingerprint



Face



Palm Vein




ACCESS CONTROL VTU - D412




Full Height Turnstile -Double Door

Specifications


| | |
|-----------------------|--|
| Model No. | VTU-D412 |
| Type | Full Height Turnstile |
| Framework Material | 304 Stainless Steel |
| Dimension | 2200 * 1250 * 2300mm |
| Inner Height | 2080mm |
| Net Weight | 350kg/pcs |
| Passage Width | 675mm/lane |
| Passing Direction | Single directional / Bi-directional |
| MCBF | 10 million |
| Power Supply | AC220V/110V, 50/60Hz |
| Operation Voltage | 24V DC |
| Power Consumption | 40W |
| Operation Temperature | -15 °C - 60 °C |
| Operation Humidity | 0 ~ 95% (No freeze) |
| Working Environment | Indoor / Outdoor |
| Flow Rate | 30 people per minute |
| LED Indicator | Two LED indicators on top: green → entry, red × no entry |

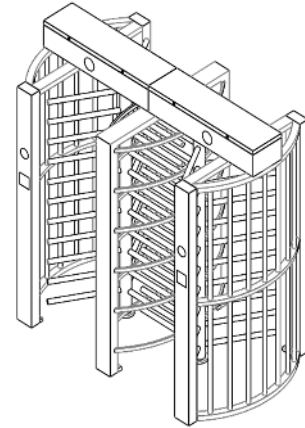

Front View

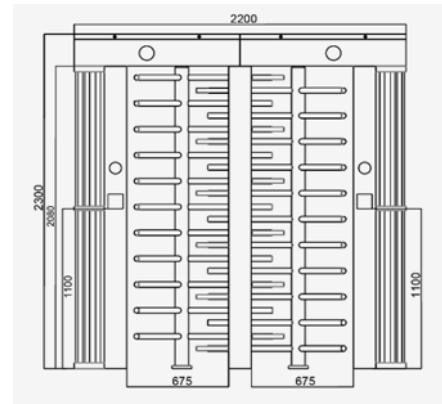

Side View

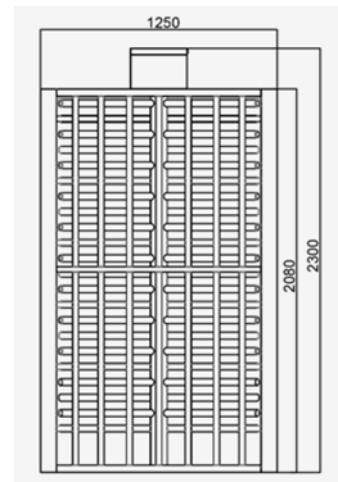

Top View

