

VVIP-2V-H5

1080P Starlight Vandal Network IR Dome



VEILUX[®]
The Art of Surveillance



Key features

- 1/2.8" Progressive Scan CMOS
- VF Lens 2.7-12mm
- 50fps/60fps@1080P(1920*1080)
- Triple Streams
- Smart IR Up to 30m
- Low bitrate ,Excellent low light performance
- WDR,3D DNR
- ROI,Defog,HLC,Corridor mode,DIS
- IP67,IK10a

Specifications

Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. illumination	Color:0.001Lux@(F1.2,AGC ON) ;B/W:0Lux@(IR LED ON)
Day & Night	ICR
Shutter Speed	1/5s-1/20000s
Auto Iris	Yes
Wide Dynamic Range	WDR>120dB
Digital Noise Reduction	2D/3D
Lens	2.7-12mm VF Lens
FOV	105°~35°
IR LED	12pcs
IR Range	Up to 30m
Image	
Video Compression	H.264/265, MJPEG
Bit Rate (CBR/VBR)	Main stream:500kb-12000kb ;Sub stream 100kb-6000kb
Audio Compression	G.711 ,RAW_PCM
Max. Resolution	1920x1080/60fps
Stream	Stream1 1920x1080/1280x720 Stream 2 D1 to QVGA Stream 3 1920x1080/1280x720/D1/VGA/640x360/CIF/QVGA
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC/BLC	Yes
9:16 Corridor Mode	Yes
DIS	Auto
AWB	Yes
ROI/Defog	Yes
Network	
Network Protocols:	IPv4,802.1x,HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, Unicast and Multicast
Alarm Trigger	Perimeter ,Single Virtual Fences ,Double Virtual Fences ,Loiter ,Multi Loiter , Object Left ,Object Removed, Abnormal Speed ,Converse, Illegal Parking ,Signal Bad , Motion Detection, Network disconnect, Disk alarm, I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware Watch Dog
Web Language	English, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian
System Compatibility	Onvif

VVIP-2V-H5


1080P Starlight Vandal Network IR Dome



VEILUX[®]
The Art of Surveillance

Interface	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	1ch Audio In&1ch Audio Out
Alarm I/O	1ch Alarm In&1ch Alarm Out
RS485	Yes
BNC Output	Yes
Reset Button	Yes
Edge Storage	Micro SD/SDHC/SDXC slot ,Max 128GB
General	
Power Supply	DC12V/POE/AC24V
Power Consumption	3W (IR LED OFF); 5W (IR LED ON)
Operating Temperature	Starting Temperature: -30 °C ~ 60 °C (-22 °F ~ 140 °F) Working Temperature: -40 °C ~ 60 °C (-40 °F ~ 140 °F)
Operating Humidity	0% - 90% RH
Ingress Protection	IP67,IK10
Certificates	CE / FCC
Product Dimensions	φ130×112mm
Product Weight	900g

Dimensions

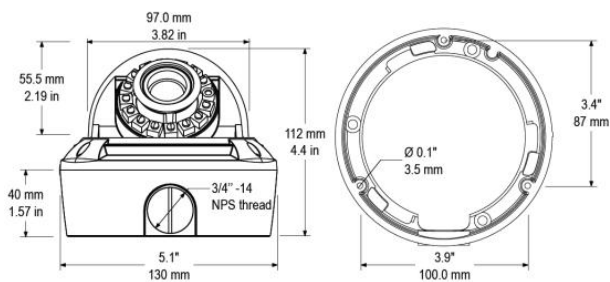

MADE IN THE USA
With Foreign & Domestic Parts