

V-RECON SERIES VX-NVR-16-POE


16 Channel Network Device Recorder



Key Features

- Up to 16ch 1080P IP cameras access
- Easy to use Same Interface of GUI/WEB/Client
- 4 SATA hard disk up to 6TB
- 1RJ45 10M/100M/1000M network interface
- 16CH POE Ports
- Simultaneous HDMI & VGA up to 1080P output
- 3 USB Host
- 2ch Alarm I/O
- 1ch Audio I/O
- 1.5U

Dimensions

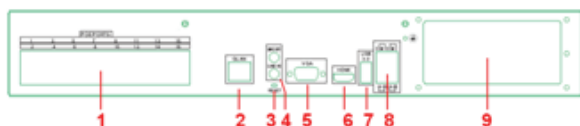

Specifications

Video/Audio Input	
Video Input	16ch 6MP/5MP/4MP/3MP/1080P/960P/720P/D1/VGA/CIF/QCIF
Incoming Bandwidth	96Mbps, (main stream 72Mbps, sub stream 24Mbps)
Outgoing Channel	Up to 16ch (Total 72Mbps)
Audio Input	G711_A/G711_U
VIDEO/AUDIO OUTPUT	
Recording Resolution	6MP/5MP/4MP/3MP/1080P/960P/720P/D1/VGA/CIF/QCIF
Frame Rate	6MP/5MP/4MP/3MP@15fps; 1080P@25fps(PAL), 30fps (NTSC);
Live View/Playback Resolution	6MP/5MP/4MP/3MP/1080P/960P/720P/D1/VGA/CIF/QCIF
Live View/Playback Capacity	Live View 16ch D1/4ch 1080P, 1ch 6MP/5MP/4MP/3MP Playback 4ch 1080P, 1ch 6MP/5MP/4MP/3MP
HDMI/VGA Output	1920x1080/60Hz, 1280x720/60Hz, 1024x768/60Hz
Audio Output	1ch, Line out
HARD DISK	
SATA HDD	4 pcs
Mounting Mode	Embedded
Capacity	Up to 6TB for each disk
NETWORK	
Network Interface	1 RJ45 10M/100M/1000M network interface
Protocol	RTP/RTCP,TCP/UDP,HTTP,DHCP,DNS,NTP
POE Interface	16ch 100Mbps, IEEE802.3af
POE Max Power	160W
INTERFACE	
HDMI/VGA	1ch HDMI, 1ch VGA
USB	USB 2.0 x 2, USB 3.0 x 1
Audio I/O	1ch MIC in, 1ch audio line out
Alarm I/O	2ch Alarm output, 2ch Alarm input
Reset Button	Yes
GENERAL	
Power Supply	AC110/220V, 47-63Hz, Max input 300W
Power Consumption	Max 15W (without HDD,USB,POE)
Operating Temperature	-10°C~+45°C
Operating Humidity	0% - 90% RH
Chassis	1.5U
Product Dimensions	440x376x67mm
Product Weight	<4kg