

# V-ARMOR SERIES SVEX-JB50

Explosion Proof Junction Box




A variety of video devices, such as telemetry board, fiber optic T/R, IP server, etc., can be installed in the JB50 Explosion-Proof Junction Box. The JB50 is certified for use in hazardous and dusty atmospheres.

## Key Features

- Stainless Steel Construction
- 6 Cable Ports
- IP 68
- Indoor and outdoor installation for all-weather use

Specifications	SVEX-JB50
Ex-Marking	II 2 GD Ex d II C T6 Gb Ex t IIIC T80°C Db
Certificate	13ATEX 1525/IECEX NEM 13.0015
License No.	XK06-123-00251
<b>ENVIRONMENTAL</b>	
Air pressure	80~110KPa
Temperature	-40°F ~ 140°F (-40°C ~ +60°C)
Humidity	≤95%RH [77°F (+25°C)]
<b>MECHANICAL</b>	
Material	Stainless Steel 304 or 316L
IP Rating	68
Available Room	∅ 255 x 135(H) mm
Weight	13KG
Shipping Weight	15KG
Cable Ports	6
Cable Entry Size	G-3/4" (default)/M25x1.5
Mount	Wall, pole, or fixed base


## Dimensions

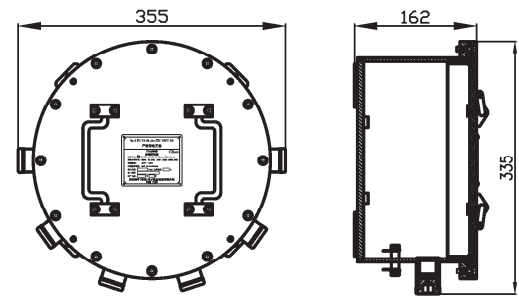

Face View

Side View

## Mounting Size

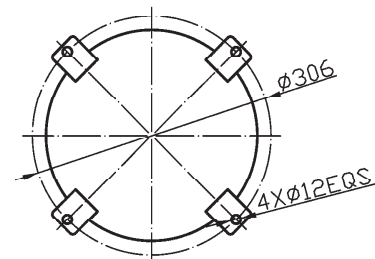

Bottom Fixed Holes